


Roller Shade Standard Specifications


Chain Mechanism and Nylon Chain (standard)

Light Gap from edge of fabric to outside edge of bracket is approximately 5/8" on each side.

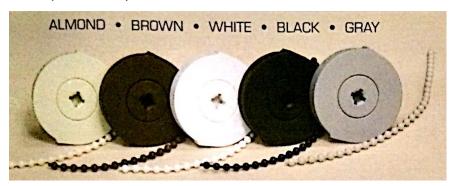

SPRING LOADED ADJUSTABLE IDLER END (Standard)

Offers ½" auto adjustment and locks into place.



BOTTOM BAR – 1 $\frac{1}{2}$ " HEM POCKET w/ 1" Aluminum Slat (Standard) – bottom bar in picture 1" x $\frac{1}{2}$ " Steel Hem (Optional at same cost) – top bar in picture




Roller Shade Standard Options

TOP TREATMENT OPTION

PVC Valance (3 ½") with Fabric insert and end caps

"L" Shape covers front and top of roller. End bracket covers additional option.





Round or Square Fascia Valance

- 1) 3" or 4" in round aluminum.
- 2) 3" in square aluminum.
- 3) 3" Round with fabric insert to match shade.

End bracket covers additional option 5 Aluminum Colors available.





Cassette w/Fabric Insert

2", 3" or 4". Shade is already installed into the cassette. Universal top mount cassette brackets included. End bracket covers additional otion.





CABLE HOLD DOWN

Used for exterior shades on decks, porches, patios, etc. Allows the shade to operate while securing the bottom rail from wind damage.

